

# AN INNOVATIVE AND INTUITIVE MULTIFUNCTION DEVICE THAT ENHANCES HIGH QUALITY OUTPUT

The imageFORCE C7165 is designed to help small, medium or large offices take high-quality marketing materials to the next level on top of daily document management.

## imageFORCE C7165



### PROFESSIONAL QUALITY PRINTING

Print a range of high-quality materials including brochures, posters and invitations. Experience industry-leading quality with 4,800 x 2,400 dpi resolution and print long sheets continuously with Air Separation Assist technology.

### ENHANCED EFFICIENCY

Enjoy uninterrupted workflows with smart features, allowing you to gain full control over printing jobs while saving you time and reducing costs.

### SMOOTH USER EXPERIENCE


Quickly carry out tasks with an easy-to-use device that offers professional print quality and the familiarity of an office printer.

### ROBUST SECURITY

Experience complete printing protection with 360° security features, without requiring IT expertise, including Network data monitoring and AI-recommended security settings.

# imageFORCE C7165

## MAIN CONFIGURATION OPTIONS

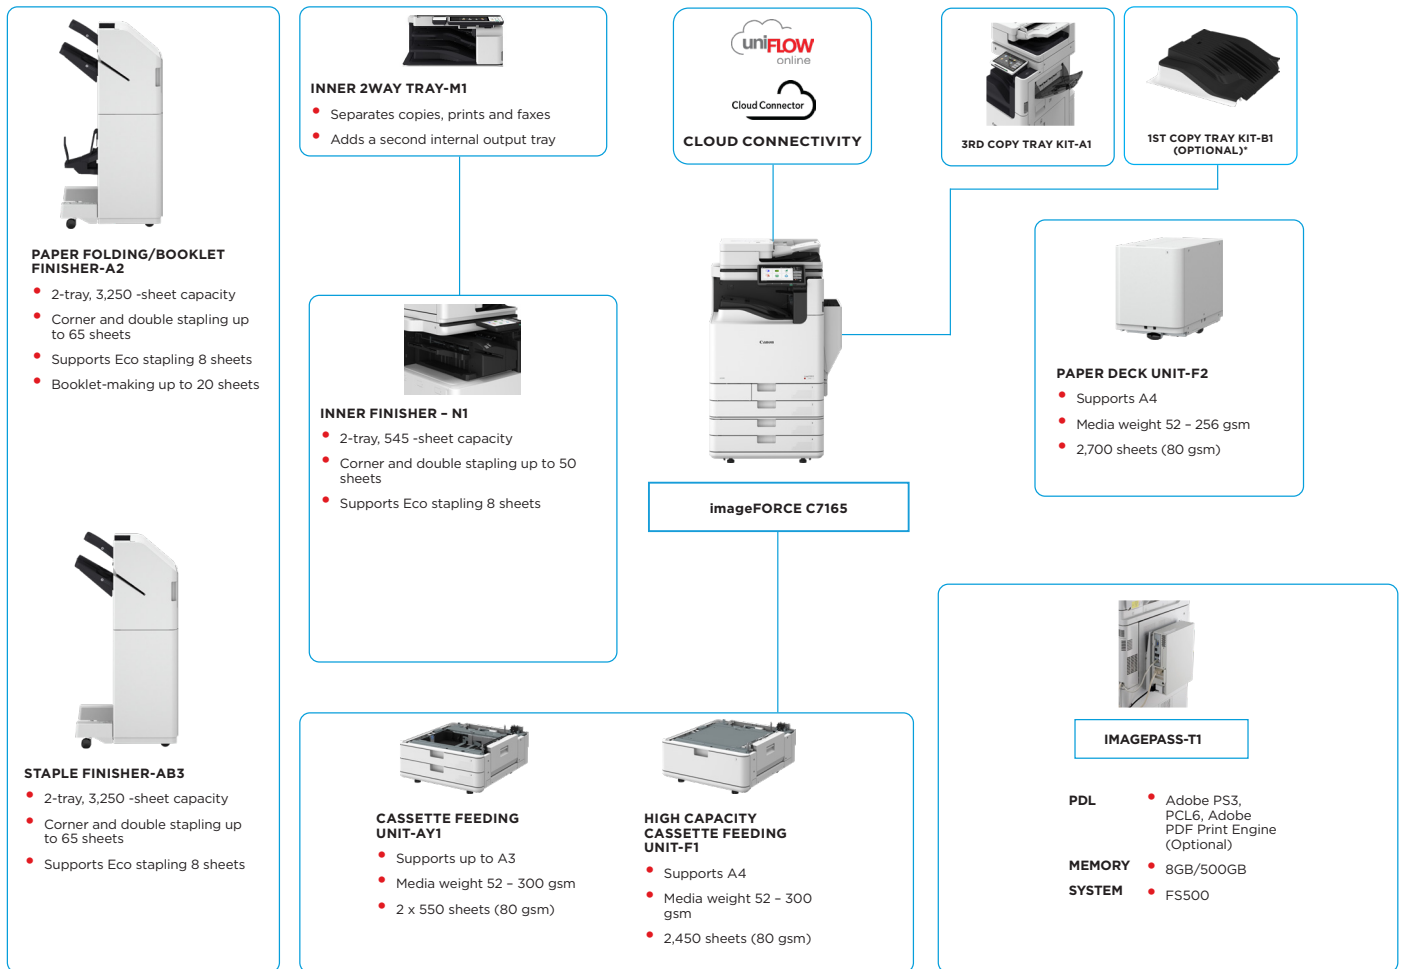

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).



# TECHNICAL SPECIFICATIONS

# imageFORCE C7165

MAIN UNIT	
<b>Machine Type</b>	A3 Color Multifunctional
<b>Core Functions</b>	Print, Copy, Scan, Send, Store and Optional Fax
<b>Processor Speed</b>	1.8GHz Dual Core Processor
<b>Control Panel</b>	10.1" TFT LCD WSVGA Color Touch panel
<b>Memory</b>	RAM: 6GB
<b>Storage</b>	Standard: (SSD) 256GB Optional: (SSD) 1TB
<b>Interface Connection</b>	NETWORK Standard: 1000Base-T/100Base-TX/ 10Base-T Optional: Wireless LAN (IEEE 802.11a/b/ g/n/ac/ax) OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1 Optional: Serial Interface, Copy Control Interface
<b>Paper Input (Standard)</b>	1,200 sheets
<b>Maximum Paper Input Capacity</b>	Standard: 1,200 sheets 100-sheet Multi-purpose tray x 1 550-sheet Paper cassette x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-F1 + Paper Deck Unit-F2)
<b>Paper Output Capacity</b>	Maximum: 3,450 Sheets (with Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2 and 3rd Copy Tray Kit-A1)
<b>Finishing Capabilities</b>	Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand, V-fold, C-fold, Z-fold * Finishing capabilities vary depending on the options connected.
<b>Supported Media Types</b>	Multi-purpose tray: Thin, Plain, Recycled, Eco, Color, Heavy, Coated, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab, Envelope, Water Resistant
<b>Supported Media Sizes</b>	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Free Size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Long sheet*: 98.0 x 457.3 mm to 320.0 mm x 1,300.0 mm Envelopes: COM 10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 90.0 mm to 320.0 x 457.2 mm * Long Sheet Feeding Tray-B1 is required.

<b>Supported Media Weights</b>	Multi-purpose tray: 52 to 300 gsm  Paper Cassette (Upper): 52 to 256 gsm Paper Cassette (Lower): 52 to 300 gsm  Duplex: 52 to 256 gsm
<b>Warm-up Time</b>	Quick Startup Mode: 4 Seconds or less * * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display.
<b>Dimensions (W x D x H)</b>	723 x 722 x 937 mm
<b>Installation Space (W x D)</b>	Basic: 1,137 x 1,162 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 2,221 x 1,162 mm (Staple Finisher-AB3/Paper Folding/ Booklet Finisher-A2 with the extension tray extended + Paper Folding Unit-L1 + Paper Deck Unit-F2 + Cassette Drawers open)
<b>Weight</b>	Approx. 115 kg

PRINT SPECIFICATIONS	
<b>Print Speed (BW/CL)</b>	up to 65 ppm* <sup>2</sup> (A4, A5* <sup>1</sup> , A5R, A6R* <sup>1</sup> ), up to 33 ppm (A3), up to 42 ppm (A4R)  * <sup>1</sup> 1-sided only. * <sup>2</sup> up to 70ppm when paper feed from 1st Cassette and Paper Deck Unit-F2 and High Capacity Cassette Feeding Unit-F1
<b>Print Resolution</b>	4,800 x 2,400 dpi
<b>Page Description Languages</b>	Standard: UFR II, PCL6/PCL5, Adobe® PostScript®3TM
<b>Double-Sided Printing</b>	Yes
<b>Direct Print</b>	Supported file types: PDF, EPS, TIFF/ JPEG, and XPS
<b>Mobile / Cloud Printing</b>	AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print and Cloud Connector  A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud- based services depending on your requirements. Please contact your sales representative for further information
<b>OS Standard Printing</b>	Android/Windows® 10/Windows® 11/ Chrome OS/macOS (11.2.2 or later) /iOS (15.2 or later)/iPadOS
<b>Fonts</b>	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T* <sup>1</sup> (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* <sup>2</sup> * <sup>1</sup> Optional PCL International Font Set-A1 is required. * <sup>2</sup> Optional Barcode Printing Kit-D1 is required.

# TECHNICAL SPECIFICATIONS

# imageFORCE C7165

<b>Print Features</b>	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
<b>Operating Systems</b>	UFR II: Windows® 10/11/Server2016/Server2019/Server2022, macOS (10.14 or later) PCL: Windows® 10/11/Server2016/Server2019/Server2022 PS: Windows® 10/11/Server2016/Server2019/Server2022, macOS (10.14 or later) PPD: Windows® 10/11/Server2016/Server2019/Server2022, macOS (10.14 or later)

## COPY SPECIFICATIONS

<b>Copy Speed</b>	up to 65 ppm*2 (A4, A5*, A5R, A6R*), up to 33 ppm (A3), up to 42 ppm (A4R)  *1 1-sided only. *2 up to 70ppm when paper feed from 1st Cassette and Paper Deck Unit-F2 and High Capacity Cassette Feeding Unit-F1
<b>First-Copy-Out Time (BW/CL)</b>	Approx. 2.7 / 3.7 seconds or less (A4, BW/CL)
<b>Copy Resolution</b>	600 x 600 (dpi)
<b>Multiple Copies</b>	Up to 999 copies
<b>Magnification</b>	Variable zoom: 25% to 400% (1% Increments)
<b>Special Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample

## SCAN SPECIFICATIONS

<b>Standard Type</b>	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Multi-Sheet Feed Detection is supported.
<b>Pull Scan Specifications</b>	Color Network ScanGear2 for both TWAIN and WIA
<b>Scan Resolution</b>	600 x 600 (dpi)
<b>Document Feeder Paper Capacity (80 gsm)</b>	Up to 200 sheets

<b>Acceptable Paper Weights</b>	Document Feeder media weight: 38 to 220 gsm (BW, CL) *An acceptable weights of A6R or smaller is 50 to 220gsm.
<b>Supported Media Sizes</b>	Platen scanning size: up to 297.0 x 431.8 mm
<b>Scan Method</b>	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online*/Cloud Connector*) *Optional
<b>Scan Speed (BW/CL; A4)</b>	1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy) 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)
<b>Double-Sided Scanning</b>	Yes

## SEND SPECIFICATIONS

<b>Optional / Standard</b>	Standard
<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP*), SMB, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax * Available OAuth 2.0 authentication method on Microsoft 365 and Google Workspace.
<b>Address Book / Speed Dials</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)
<b>Send Resolution</b>	1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy) 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)
<b>Communication Protocol</b>	File: FTP(TCP/IP), up to SMB 3.11 (TCP/IP), WebDAV E-mail/fax: SMTP, POP3
<b>File Format</b>	TIFF(MMR), JPEG*, PDF(Compact, Searchable, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS(Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word) * Only Single page
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages

# TECHNICAL SPECIFICATIONS

# imageFORCE C7165

## FAX SPECIFICATIONS

<b>Optional / Standard</b>	Optional
<b>Maximum Number of Connection Lines</b>	2
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps
<b>Compression Method</b>	MH, MR, MMR, JBIG
<b>Resolution</b>	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
<b>Sending/Recording Size</b>	Sending: A3, A4, A4R, A5*1, A5R*1, A6R*1, B4, B5*2, B5R*1 Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R *1 Sent as A4 *2 Sent as B4 short
<b>FAX Memory</b>	Up to 30,000 pages (2,000 jobs)
<b>Speed Dials</b>	Max. 200
<b>Group Dials/Destinations</b>	Max. 199 dials
<b>Sequential Broadcast</b>	Max. 199 dials
<b>Memory Backup</b>	Max. 256 addresses
<b>Fax Features</b>	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

## STORE SPECIFICATIONS

<b>Mail Box</b>	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored
<b>Advanced Space</b>	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 10/11 Concurrent Connections (Max.): SMB:64, WebDAV:3
<b>Advanced Space Available Disk Space</b>	Standard:16 GB (With option: max. 480GB)
<b>Advanced Space Features</b>	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

## SECURITY SPECIFICATIONS

<b>Authentication &amp; Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOWOnline/uniFLOW(PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Cloud Connector (PIN Login), Microsoft Entra ID (PIN Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control)
<b>Network Security</b>	TLS 1.3, IPSec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), up to WPA3 (using Wi-Fi), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP, Scan and Send -Virus Concerns for E-mail Reception
<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) *Requires uniFLOW Online/uniFLOW

# TECHNICAL SPECIFICATIONS

# imageFORCE C7165

<b>Device Security</b>	Protecting SSD Data [SSD Data Encryption (FIPS140-3), SSD Lock], Standard SSD Initialize, Initialize (NIST 800-88 PURGE LEVEL), Trusted Platform Module (TPM 2.0), Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control, HCD-PP Common Criteria Certification
<b>Device Management &amp; Auditing</b>	Administrator Password, Digital Certificate And Key Management, Audit Log, SAN certificates, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

## ENVIRONMENTAL SPECIFICATIONS

<b>Operating Environment</b>	Temperature: 10 to 30°C Humidity: 20 to 80 % RH (Relative Humidity)
<b>Power Source</b>	220-240 V, 50/60 Hz, 6 A
<b>Power Consumption</b>	Maximum: Approx. 2,000 W Copying (with DADF continuous scan): Approx. 962.3W <sup>1*</sup> Standby: Approx. 53.7 W <sup>1*</sup> Sleep mode: Approx. 0.5 W <sup>2*</sup> Typical Electricity Consumption (TEC)*: 0.71 kWh <sup>1</sup> Reference value: measured one unit <sup>2</sup> 0.5 W is not available in all circumstances due to certain settings. * For detailed information relating to Erp:Lot6/26 regulation, please go to: <a href="https://www.canon-europe.com/for_work/lot26/">https://www.canon-europe.com/for_work/lot26/</a>
<b>Standards</b>	Blue Angel (UZ219) (validation pending)
<b>Noise Levels (BW/CL)</b>	65 dB, Kv 3 dB* *Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

## SOFTWARE & PRINTER MANAGEMENT

<b>Tracking &amp; Reporting</b>	uniFLOW Online
<b>Cloud Connectivity</b>	uniFLOW Online/Cloud Connector
<b>Remote Management Tools</b>	iW Enterprise Management Console Monitoring Service Remote Distribution & Management Service
<b>Scanning Software</b>	Color Network ScanGear 2
<b>Optimisation Tools</b>	Canon Driver Configuration Tool
<b>Platform</b>	MEAP (Multifunctional Embedded Application Platform)

## Fiery Print Controller Specifications (Embedded)

<b>Optional/Standard</b>	Optional
<b>Name</b>	imagePASS-T1
<b>Print Resolution (dpi)</b>	1200 x 1200, 600 x 600
<b>Page Description Language(s)</b>	Adobe PS3,PCL6,Adobe PDF Print Engine (Optional)
<b>Memory</b>	8GB (4GBx2)
<b>Hard Disk Drive</b>	500 GB SATA
<b>Processor Speed</b>	Intel Pentium Gold 5400(3.7GHz)
<b>System</b>	FS500
<b>Fonts</b>	PS: 138 Fonts PCL: 113 Fonts
<b>Supported Operating Systems</b>	Windows10 32bit* <sup>1</sup> and 64 bit / Windows11/ Windows Server 2016/ Windows Server 2019/ Windows Server 2022/ macOS 10.15, 11.0, 12, 13, 14 <sup>1</sup> : Windows10 32bit are supported by printer driver only.
<b>Interface</b>	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB3.0 x 2 (Rear)
<b>Network Protocols</b>	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNTP, 802.1X, DHCP, DNS, NTP)
<b>Direct Print</b>	PDF1.7, EPS, TIFF6, JDF1.4/ JMF(Optional)
<b>VDP</b>	FreeForm v1, v2.1
<b>Fiery Print Controller Standard Features</b>	Fiery Command WorkStation 7/Paper Catalog/Fiery Spot-On/Fiery Remote Scan
<b>Fiery Print Controller Options</b>	Fiery Impose/Fiery Compose/ Fiery Impose and Compose/Fiery Automation package/Fiery ColorRight package/Fiery JobExpert and PDF Processing Kit
<b>HW Platform</b>	E500
<b>Base Operating System</b>	Debian of Linux
<b>Power Source</b>	AC100-240V, 50/60Hz; 1.5A (100V) - 1.0A (240V)
<b>Maximum Power Consumption</b>	55W

## CONSUMABLES

<b>Toner Cartridge/s</b>	Toner 3001 BK/C/M/Y
<b>Toner (Estimated Yield @ 8.5% Coverage)</b>	Toner 3001 BK: 37,500 pages Toner 3001 C/M/Y: 27,500 pages

# TECHNICAL SPECIFICATIONS

# imageFORCE C7165

## PAPER SUPPLY OPTIONS

<b>Cassette Feeding Unit-AY1</b>	<p>Paper Capacity: Paper Capacity: 2 x 550 sheets (80 gsm)            Paper Type: Thin, Plain, Recycled, Eco, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead            Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R            Custom size: 98.0 x 148.0 mm to 304.8 x 457.2 mm            Paper Weight: 52 to 300 gsm</p>
<b>High Capacity Cassette Feeding Unit-F1</b>	<p>Paper Capacity: 2,450 sheets (80 gsm)            Paper Type: Thin, Plain, Recycled, Eco, Color, Heavy, Bond, Pre-punched, Letterhead            Paper Size: A4            Paper Weight: 52 to 300 gsm</p>
<b>Paper Deck Unit-F2</b>	<p>Paper Capacity: 2,700 sheets (80 gsm)            Paper Type: Thin, Plain, Color, Recycled, Heavy, Pre-punched            Paper Size: A4, B5            Paper Weight: 52 to 256 gsm</p>

## OUTPUT OPTIONS

<b>1st Copy Tray Kit-B1</b>	<p>Capacity (with 80gsm paper):            A4, A5, A5R, A6R, B5: 250 sheets            SRA3, A3, A4R, B4, B5R: 100 sheets            Long sheet*:            Length up to 900.0 mm: 20 sheets (151 to 163 gsm)            Length up to 1,200.0 mm: 1 sheet (151 to 163 gsm)            Paper Weight: 52 to 300 gsm            * Long Sheet Catch Tray-D1 is required.</p>
<b>Inner 2way Tray-M1</b>	<p>(Requires 1st Copy Tray Kit-B1)            Tray Capacity (with 80 gsm paper)            Upper tray: A4, A5, A5R, A6R, B5: 100 sheets                SRA3, A3, A4R, B4, B5R: 50 sheets            Lower tray (standard tray): A4, A5, A5R, A6R, B5: 250 sheets                SRA3, A3, A4R, B4, B5R: 100 sheets            Paper Weight: 52 to 300 gsm</p>
<b>3rd Copy Tray Kit-A1</b>	<p>Capacity (with 80gsm paper):            A4, A5R, B5: 100 sheets            A3, A4R, B4, B5R: 75 sheets            Paper Weight: 52 to 300 gsm</p>

<b>Inner Finisher-N1</b>	<p>Tray Capacity (with 80gsm paper):            Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : approx. 45 sheets                long sheet length of up to 900.0 mm: 1 sheet            Lower Tray: A4, A5, A5R, B5: approx. 500 sheets                A3, A4R, B4, B5R: 250 sheets                A6R: 30 sheets                SRA3, Envelope: 10 sheets            Paper Weight: 52 to 300 gsm            Staple Position: Corner, Double            Staple Capacity: (52 to 90 gsm)                A4, B5: 50 sheets                A4R: 40 sheets                A3, B4: 30 sheets            Eco Staple:                A3, A4, B4, B5: 10 sheets (52 to 64 gsm)                8 sheets (65 to 81.4 gsm)                6 sheets (82 to 105 gsm)            Staple On Demand: approx. 40 sheets (80 gsm)</p>
<b>Staple Finisher-AB3</b>	<p>(Requires Buffer Pass Unit-R1)            Tray Capacity (with 80gsm paper):            Upper Tray: A4, A5, A5R, A6R, B5: approx. 250 sheets                SRA3, A3, A4R, B4, B5R: approx. 125 sheets            Lower Tray: A4, A5, A5R, B5: 3,000 sheets                SRA3, A3, A4R, B4, B5R: 1,500 sheets                A3, B4 (Z-fold*): 30 sheets                A4R (Z-fold*): 10 sheets                A6R: 250 sheets            Envelopes: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets            Paper Weight:                Upper Tray: 52 to 256 gsm                Lower Tray: 52 to 300 gsm            Staple Position: Corner, Double            Staple Capacity: (52 to 90 gsm)                A4, B5: 65 sheets                A4R: 40 sheets                A3, B4: 30 sheets            Eco Staple:                A3, A4: 10 sheets (52 to 64 gsm)                8 sheets (65 to 81.4 gsm)                6 sheets (82 to 105 gsm)            Staple On Demand: 65 sheets (52 to 90 gsm)            * Paper Folding Unit-L1 is required.</p>

# TECHNICAL SPECIFICATIONS

# imageFORCE C7165

<b>Paper Folding/ Booklet Finisher-A2</b>	(Requires Buffer Pass Unit-R1) (Includes the above Staple Finisher-AB3 basic staple specifications.) Saddle Stitch paper size: A3, A4R, B4 Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm) V-fold Capacity: up to 5 sheets (52 to 105 gsm) C-fold Capacity: up to 6 sheets (52 to 90 gsm) up to 5 sheets (52 to 128 gsm)
<b>Paper Folding Unit-L1</b>	(Requires Buffer Pass Unit-R1) Paper size: A3, A4R, B4
<b>Inner 2/4 Hole Puncher-D1</b>	(Requires the Inner Finisher-N1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
<b>Inner 4 Hole Puncher-D1</b>	(Requires the Inner Finisher-N1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R
<b>2/4 Hole Puncher Unit-A1</b>	(Requires either the Staple Finisher- AB3 or Paper Folding/Booklet Finisher-A2) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
<b>4 Hole Puncher Unit-A1</b>	(Requires either the Staple Finisher- AB3 or Paper Folding/Booklet Finisher-A2) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R



**Canon Ireland**  
3006 Lake Drive  
Citywest, Saggart  
Co. Dublin, Ireland  
Telephone No: 01 2052400  
Facsimile No: 01 2052525  
canon.ie

**Canon (UK) Ltd**  
The Bower  
4 Roundwood Avenue  
Stockley Park  
Uxbridge  
UB11 1AF

**Canon Inc.**  
Canon.com  
**Canon Europe**  
canon-europe.com  
**English Edition**  
© Canon Europa N.V. 2024