


# C7270 / C7260

## Product Specifications

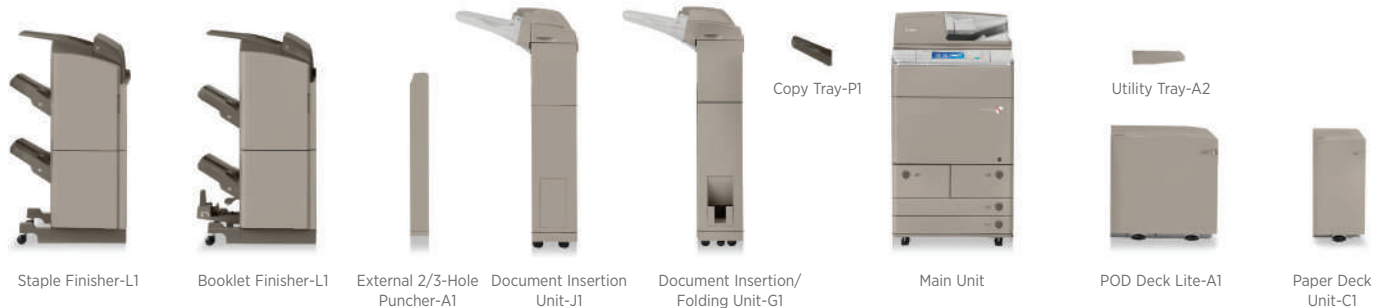

### Main Unit

#### System Type

Color Digital Multifunction Imaging System

#### Functions

Standard: Copy, Print (UFR II), Scan, Send, Store  
 Optional: Print (PCL 5c/6, Adobe® PostScript® 3™), Fax (Up to 4 Lines)

#### Operation Panel

Standard: 8.4" SVGA Full-Color, TFT Screen  
 Optional: 10.4" SVGA Full-Color, TFT Upright Screen

#### Memory

Standard: 2GB RAM  
 Maximum: 2.5GB RAM

#### Hard Disk Drive

Standard: 160GB  
 Maximum: 1TB

#### Mirroring Hard Disk Drive

Optional (160GB, 1TB), Method: RAID1

#### Network Interface Connection

Standard: 10Base-T/100Base-TX/1000Base-T  
 Optional: Wireless LAN (IEEE 802.1x via third-party adapter)

#### Other Interface

Standard: USB 2.0 (Host) x2, USB 2.0 (Device)  
 Optional: Device Port [USB 2.0 (Host) x2], Serial Interface, Copy Control Interface

#### Copy/Print Speed (BW/Color)

Letter: **C7270:** Up to 70/60 ppm  
**C7260:** Up to 60/55 ppm  
 Legal: **C7270:** Up to 41/35 ppm  
**C7260:** Up to 35/32 ppm  
 11" x 17": **C7270:** Up to 35/30 ppm  
**C7260:** Up to 30/27 ppm

#### First-Copy-Out Time (Letter)

BW: 4.9 Seconds or Less  
 Color: 6.6 Seconds or Less

#### Paper Sources (20 lb. Bond)

Standard: Dual 1,100-sheet Paper Drawers, Dual 550-sheet Paper Cassettes, 100-sheet Stack Bypass  
 Optional: 3,500-sheet Paper Deck Unit or 3,500-sheet POD Deck Lite  
 Maximum: 6,900 Sheets (w/Paper Deck Unit Option)

#### Output Paper Capacity (20 lb. Bond)

4,000 Sheets (w/Staple Finisher or Booklet Finisher)

#### Acceptable Paper Sizes

Drawers: Letter  
 Cassettes: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 13" x 19-1/4")  
 Bypass: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelopes, Custom Size (4" x 5-7/8" to 13" x 19-1/4")

#### Acceptable Paper Weights

Drawers/Cassettes: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)  
 Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300g/m<sup>2</sup>)

#### Duplexing

Paper Size: Standard Automatic Trayless Duplexing (Up to 13" x 19")

Paper Weights: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)

#### Media Support

Thin [14 lb. Bond to 16 lb. Bond (52 to 63g/m<sup>2</sup>)], Plain 1 [17 lb. Bond to 21 lb. Bond (64 to 81g/m<sup>2</sup>)], Plain 2 [22 lb. Bond to 28 lb. Bond (82 to 105g/m<sup>2</sup>)], Heavy 1 [29 lb. Bond to 40 lb. Bond (106 to 150g/m<sup>2</sup>)], Heavy 2 [56 lb. Cover to 80 lb. Cover (151 to 220g/m<sup>2</sup>)], Heavy 3 [82 lb. Cover to 140 lb. Index (221 to 256g/m<sup>2</sup>)], Heavy 4 [140 lb. Index to 110 lb. Cover (257 to 300g/m<sup>2</sup>)], Color, Recycled, Pre-Punched, Transparency, Tracing, Labels, Bond, Letterhead, Tab, Textured, Coated, Envelopes

#### Warm-up Time

From Power On: 31 Seconds or Less  
 From Sleep Mode: 30 Seconds or Less  
 Quick Startup Mode: 7 Seconds\*

#### Power Requirements/Plug

120V AC, 60Hz, 16A/NEMA 5-20P

#### Power Consumption

Maximum: 2kW  
 Sleep Mode: 0.9W or Less

#### Dimensions (H x W x D)

Without the Upright Control Panel: 48-1/8" x 27-1/8" x 36-3/4" (1221mm x 689mm x 932mm)  
 With the Upright Control Panel (To the right edge of the Upright Control Panel in the right-most position): 55-1/4" x 46-1/2" x 36-3/4" (1403mm x 1180mm x 932mm)

#### Installation Space (W x D)

52-7/8" x 36-3/4" (1344mm x 932mm)

#### Weight

Approx. 604 lb. (274kg)\*\*

#### Toner (Estimated Yield @ 5% Coverage)

Black: 80,000 Images  
 Color (C,M,Y): 52,000 Images

### Image Reader Unit

Scan Resolution: Up to 600 x 600 dpi

#### Acceptable Originals (Glass)

Sheet, Book, 3-Dimensional Objects [Up to 4.4 lb. (2kg)]

Maximum Original Size: Up to 11" x 17"

## Main Unit (continued)

### Document Feeder

#### Scan Method

Single-Pass Duplexing Automatic Document Feeder

#### Acceptable Originals

Paper Sizes: 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R

Paper Weights: **1-sided scanning:**  
13 lb. Bond to 80 lb. Cover (50 to 220g/m<sup>2</sup>)  
**2-sided scanning (Black-and-white original):**  
13 lb. Bond to 80 lb. Cover (50 to 220g/m<sup>2</sup>)  
**2-sided scanning (Color original):**  
17 lb. Bond to 80 lb. Cover (64 to 220g/m<sup>2</sup>)

#### Scan Speed (BW/Color; Letter)

Simplex: Up to 120/120 ipm (300 dpi)  
Up to 120/70 ipm (600 dpi)  
Duplex: Up to 200/140 ipm (300 dpi)  
Up to 120/70 ipm (600 dpi)

#### Paper Capacity (20 lb. Bond)

300 Sheets

### Copy Specifications

#### First-Copy-Out Time (Letter)

BW: 4.9 Seconds or Less  
Color: 6.6 Seconds or Less

#### Multiple Copies

1 to 9,999

#### Copy Exposure

Automatic or Manual (9 Levels)

#### Magnification

25% - 400% (1% Increments)

#### Preset Reductions

25%, 50%, 64%, 73%, 78%

#### Preset Enlargements

121%, 129%, 200%, 400%

#### Basic Copy Features

Preset R/E Ratios by Area, Finishing, Two-Sided, Exposure Adjustment, Original Type Selection, Interrupt Mode, Sample Set, Setting Confirmation/Cancel, Standard Keys, Reset, Guide Display, Job Duration Display, Reserved Copying

#### Special Copy Features

Two-page Separation, Cover/Sheet Insertion, Booklet, Transparency Interleaving, Shift, Margin, Frame Erase, Image Combination, Different-size Original, Job Build, Job Done Notice, Scan Image Check, Mode Memory, Recall, Negative/Positive Inversion, Image Repeat, Mirror Image, Sharpness, Tab Paper Creation, Form Composition, Secure Watermark, Page Numbering, Copy Set Numbering, Watermark and Date, Job Block Combination, Store in User Inbox

### Print Specifications

#### Processor

Canon Dual Custom Processor (Shared)

#### Memory

Standard: 2GB RAM  
Maximum: 2.5GB RAM

#### Hard Disk Drive

Standard: 160GB  
Maximum: 1TB

#### Engine Resolution

1200 x 1200 dpi

#### PDL Support

Standard: UFR II  
Optional: PCL 5c/6, Adobe PS 3

#### Print Driver Supported OS

UFR II, PCL 5c/6, Adobe PS 3:  
Windows® (XP/Windows Vista®/7/8), Windows Server (2003/2008/2008 R2/SBS 2011/2012), Windows Terminal Servers (Server 2003/Server 2008/Server 2008 R2/2012), Microsoft® Clustering Server (Server 2003/Server 2003 R2/Server 2008/Server 2008 R2), Citrix (Presentation Server 4.5, Xen App 5.0/6.0/6.5, Xen Desktop 4.0/5.0/5.5/5.6), Macintosh® (OS X 10.5.8 or later, UFR II and PS 3 only), VMware, SAP (PS and PCL Only)

#### Direct Print Support

Standard: TIFF, JPEG  
Optional: PDF, EPS,\*\*\* XPS†

#### Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secure Print, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Printing on Transparencies, Front/Back Covers, Black-and-White Printing, Objective, Color/Black-and-White Auto Detect, Toner Reduction, Poster Printing

### Scan Specifications

**Network TWAIN Scan:** Standard

**Network Scan Utility:** Color Network ScanGear

### Universal Send Specifications

#### Sending Method

E-mail, I-Fax, File Server (FTP, SMB, WebDAV), Mail Box, Super G3 Fax (Optional)

#### Color Mode

Auto Color Select (Color, Gray), Auto Color Select (Color, Black), Full Color, Grayscale, BW

#### Scan Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi, 150 x 150 dpi, 100 x 100 dpi

#### Address Book Capacity

Max. 1,800 Destinations (Incl. 200 One-Touch Buttons)

#### Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP), WebDAV  
E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

#### File Format

Standard: TIFF, JPEG, PDF, PDF (Compact), PDF (Searchable), PDF (Apply Policy), PDF (Optimize for Web), PDF/XPS (OCR), PDF/A-1b, XPS, XPS (Compact), OOXML (.ptx and .docx)  
Optional: PDF (Trace & Smooth), PDF (Encrypted), PDF/XPS (Digital Signature), PDF (Reader Extensions)

#### I-Fax Data Format

Color: .tfx (JPEG)  
BW: .tif (MH, MR, MMR)

#### Universal Send Features

Two-sided Original, Different-size Originals, Original Type Selection, Book to Two Pages, Density Adjustment, Sharpness, Document Name, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, Sender's Name (TTI), E-mail Priority

### Fax Specifications

**Maximum Number of Connection Lines:** 4

#### Modem Speed

Super G3: 33.6 Kbps  
G3: 14.4 Kbps

**Compression Method:** MH, MR, MMR, JBIG

#### Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

**Sending/Recording Size:** Statement-R to 11" x 17"

#### Fax Features

Job Forwarding, Different-size Originals, Adjusting Overall Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Selecting the Telephone Line (when sending fax), Delayed Send, Preview, Finished Stamp, Job Done Notice, Original Type Selection, Two-sided Original, Book to Two Pages

### Store Specifications

#### Mail Box (Number supported)

100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes

6,000 Maximum Pages Stored

#### Advanced Box

Available: Approx. 15GB (Standard HDD)  
Disk Space: Approx. 629GB (1TB HDD)

#### Communication

Protocol: SMB or WebDAV  
Supported Client PC: Windows (Windows 2000/XP/7/8/Windows Vista)  
Concurrent Connections (Max.): SMB: 32, WebDAV: 12 (Active Sessions)  
Advanced Box Features: Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

#### Memory Media

Standard: USB Memory  
Optional: SD, SDHC, CompactFlash, Memory Stick, Microdrive

### Security Specifications

#### Standard

Department ID Management, Single Sign-On H, Access Management System (Device and Function Level Log-in), Secure Print, Trusted Platform Module, User Access Control of Advanced Box, Mail Box Password Protection, IPv6, Restricting Features (Restricting the Send Function, Restricting New Addresses on Address Book), SSL Encrypted Communication, SNMPv1/v3, MAC/IP Address Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Erase (Up to 3x), HDD Initialize (Up to 9x), HDD Lock, IPsec, Adobe LiveCycle® Rights Management ES2.5 Integration

#### Optional

Removable HDD, HDD Encryption, HDD Mirroring, Encrypted Secure Print, Encrypted PDF, Document Scan Lock, Secure Watermark, IEEE 2600.1 Common Criteria Certification††

### Environmental Information

**ENERGY STAR® Qualified**

**EPEAT® Gold**

**EU RoHS Compliant**

**Ecomark**

**Blue Angel**

**WEEE Directive**

## Optional Accessories

### Paper Supply Options

#### Paper Deck Unit-C1

Paper  
Capacity: 3,500 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]  
Number of Drawers: 1  
Acceptable Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)  
Acceptable Paper Size: Letter  
Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-Punched  
Power Source/  
Max. Power  
Consumption: From Main Unit/Approx. 44W  
Dimensions 22-1/2" x 12-3/4" x 23"  
(H x W x D): (570mm x 323mm x 583mm)  
Weight: Approx. 81.6 lb. (37kg)

#### POD Deck Lite-A1

Paper  
Capacity: 3,500 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]  
Number of Drawers: 1  
Acceptable Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300g/m<sup>2</sup>)  
Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R  
Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-Punched, Transparency, Labels, Bond, Textured, Coated, Letterhead  
Power Source/  
Max. Power  
Consumption: 120-127V AC, 60Hz, 2.4A/Approx. 263W  
Dimensions 22-1/2" x 23-5/8" x 24-1/2"  
(H x W x D): (570mm x 601mm x 621mm)  
Weight: Approx. 110 lb. (50kg)

### Output Options

#### Copy Tray-PI

Total Output  
Capacity: Up to 250 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]  
Acceptable Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300g/m<sup>2</sup>)  
Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelopes, Custom Size (4" x 5-7/8" to 13" x 19-1/4")  
Dimensions 6-7/8" x 16-1/2" x 15"  
(H x W x D): (175mm x 420mm x 382mm)  
Weight: Approx. 2.9 lb. (1.3kg)

#### Booklet Finisher-L1

Number of Trays: 3  
Total Output Capacity: 4,000 Sheets (Letter)  
Tray A: 250 Sheets (Letter, Statement-R, Executive)  
125 Sheets (13" x 19", 12-5/8" x 17-3/4", 12" x 18", 11" x 17", Legal, Letter-R)  
Tray B: 1,300 Sheets (Letter, Statement-R, Executive)  
650 Sheets (13" x 19", 12-5/8" x 17-3/4", 12" x 18", 11" x 17", Legal, Letter-R)  
Tray C: 2,450 Sheets (Letter)  
1,700 Sheets (Statement-R, Executive)  
650 Sheets (13" x 19", 12-5/8" x 17-3/4", 12" x 18", 11" x 17", Legal, Letter-R)  
Acceptable Paper Weight:  
Tray A: 14 lb. Bond to 140 lb. Index (52 to 256g/m<sup>2</sup>)  
Tray B, C: 14 lb. Bond to 110 lb. Cover (52 to 300g/m<sup>2</sup>)

Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelopes, Custom Size [4" x 5-7/8" to 13" x 19-1/4" (100mm x 148mm to 330.2mm x 487.7mm)]

Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-Punched, Transparency, Tracing, Labels, Bond, Letterhead, Tab, Textured, Coated, Envelopes

Staple Positions: **Corner/Double Stapling:** 11" x 17", Legal, Letter, Letter-R, Executive  
**Saddle-Stitch:** 12" x 18", 11" x 17", Legal, Letter-R

Maximum Stapling Capacity: **Letter and Executive:** 50 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]  
**11" x 17", Legal, Letter-R:** 30 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]

Paper Capacity of Staple Mode: **Tray B and Tray C:** 1,300 Sheets/100 Sets (Letter, Executive), 650 Sheets/50 Sets (11" x 17", Legal, Letter-R)

Maximum Saddle-Stitch Capacity: 16 Sheets [20 lb. Bond (80g/m<sup>2</sup>)] [including 1 Cover Sheet, up to 140 lb. Index (256g/m<sup>2</sup>)]

Paper Capacity of Saddle-Stitch Mode: 1 to 5 Sheets/25 Sets, 6 to 10 Sheets/15 Sets, 11 to 16 Sheets/10 Sets

Type of Staple: Staple-J1 (5,000 x 3)  
Staple Cartridge-D2 (2,000 x 3)

Saddle Fold: 1 Sheet [16 lb. Bond to 140 lb. Index (60 to 256g/m<sup>2</sup>)]

Power Source/  
Max. Power  
Consumption: From the Main Unit/Approx. 151W (including the External 2/3 Hole Puncher-A1) Approx. 125W (excluding the External 2/3 Hole Puncher-A1)

Dimensions 44-1/8" x 25-1/2" (30\*\*\*\*) x 25-7/8"  
(H x W x D): [1121mm x 646mm (761 mm\*\*\*\*) x 656 mm]

Weight: Approx. 159 lb. (72kg)

#### Staple Finisher-L1

Number of Trays: 3  
Total Output Capacity: 4,000 Sheets (Letter)  
Tray A: 250 Sheets (Letter, Statement-R, Executive)  
125 Sheets (13" x 19", 12-5/8" x 17-3/4", 12" x 18", 11" x 17", Legal, Letter-R)  
Tray B: 1,300 Sheets (Letter, Statement-R, Executive)  
650 Sheets (13" x 19", 12-5/8" x 17-3/4", 12" x 18", 11" x 17", Legal, Letter-R)  
Tray C: 2,450 Sheets (Letter)  
1,700 Sheets (Statement-R, Executive)  
650 Sheets (13" x 19", 12-5/8" x 17-3/4", 12" x 18", 11" x 17", Legal, Letter-R)

Acceptable Paper Weight:  
Tray A: 14 lb. Bond to 140 lb. Index (52 to 256g/m<sup>2</sup>)  
Tray B, C: 14 lb. Bond to 110 lb. Cover (52 to 300g/m<sup>2</sup>)

Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelopes, Custom Size [4" x 5-7/8" to 13" x 19-1/4" (100mm x 148mm to 330.2mm x 487.7mm)]

Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-Punched, Transparency, Tracing, Labels, Bond, Letterhead, Tab, Textured, Coated, Envelopes

Staple Positions: **Corner/Double Stapling:** 11" x 17", Legal, Letter, Letter-R, Executive

Maximum Stapling Capacity: **Letter and Executive:** 50 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]  
**11" x 17", Legal and Letter-R:** 30 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]

Paper Capacity of Staple Mode: **Tray B and Tray C:** 1,300 Sheets/100 Sets (Letter, Executive), 650 Sheets/50 Sets (11" x 17", Legal, Letter-R)

Type of Staple: Staple-J1 (5,000 x 3)

Power Source/  
Max. Power  
Consumption: From the Main Unit/Approx. 130W (including the External 2/3-Hole Puncher-A1) Approx. 124W (excluding the External 2/3-Hole Puncher-A1)

Dimensions 44-1/8" x 25-3/8" (30\*\*\*\*) x 25-7/8"  
(H x W x D): [1121mm x 644mm (761mm\*\*\*\*) x 656mm]

Weight: Approx. 106 lb. (48kg)

#### External 2/3-Hole Puncher-A1

Acceptable Punch Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256g/m<sup>2</sup>)  
Acceptable Punch Paper Type: Thin, Plain, Heavy, Color, Recycled, Bond, Letterhead, Tab, Textured, Coated  
Acceptable Punch Paper Size: 11" x 17", Legal, Letter, Letter-R  
Punch Type: **2 Holes:** (Legal, Letter-R)  
**3 Holes:** (11" x 17", Letter)

Distance Between Punch Holes: **2 Holes:** 2-3/4" (70mm)  
**3 Holes:** 4-1/4" (108mm)  
Punch Waste  
Tray Capacity: Approx. 10,000 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]

Power Source: From the Main Unit  
Dimensions 32-1/2" x 4-1/4" x 24-1/4"  
(H x W x D): (825mm x 107mm x 615mm)  
Weight: Approx. 17 lb. (7.7kg)

#### Document Insertion Unit-J1

Acceptable Media: Covers and Inserts  
Number of Trays: 1  
Tray Capacity: 100 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]  
Acceptable Paper Weight: 16 lb. Bond to 140 lb. Index (60 to 256g/m<sup>2</sup>)  
Acceptable Paper Type: Thin, Plain, Heavy, Color, Recycled, Bond, Letterhead, Tab, Textured, Coated  
Acceptable Paper Size: 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive  
Power Source/  
Max. Power  
Consumption: 100-240V AC, 50/60Hz, 1.0A/  
Approx. 85W  
Dimensions 48-7/8" x 26-1/8" x 26-3/4"  
(H x W x D): (1242mm x 662mm x 679mm)  
Weight: Approx. 88.2 lb. (40kg)

#### Document Insertion/Folding Unit-G1

Folding Method: Roller Pressure Folding  
Folding Type: Z-Fold, C-Fold  
Acceptable Paper Weight: **Z-Fold:** 16 lb. Bond to 28 lb. Bond (60 to 105g/m<sup>2</sup>)  
**C-Fold:** 16 lb. Bond to 28 lb. Bond (60 to 105g/m<sup>2</sup>)  
**Insertion Unit:** 16 lb. Bond to 140 lb. Index (60 to 256g/m<sup>2</sup>)  
Acceptable Paper Type: **Z-Fold/C-Fold:** Thin, Plain, Color, Recycled  
**Insertion Unit:** Thin, Plain, Heavy, Color, Recycled, Bond, Letterhead, Tab, Textured, Coated  
Acceptable Paper Size: **Z-Fold:** 11" x 17", Legal, Letter-R  
**C-Fold:** Letter-R  
**Insertion Unit:** 13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive  
Power Source/  
Max. Power  
Consumption: 100-240V AC, 50/60Hz, 1.0A/  
Approx. 136W  
Dimensions 48-7/8" x 26-1/8" x 26-3/4"  
(H x W x D): (1242mm x 662mm x 679mm)  
Weight: Approx. 168 lb. (76kg)

**Optional Accessories** (continued)

**Additional Print Controller Options**

**imagePASS-A2 Controller**

Type: Embedded  
 Processor: Intel® Pentium® Processor E5300 2.6GHz  
 System: Fiery® System 10e  
 PDL Support: Adobe PS 3, PCL 5c/6  
 Print: 1200 x 1200 dpi  
 Resolution: 2400 dpi equivalent x 600 dpi  
 Memory: 2GB (Standard/Maximum)  
 HDD: 160GB  
 Interface (to LAN): 10Base-T/100Base-TX/1000Base-T  
 Dimensions (H x W x D): 11-3/5" x 14-2/5" x 3-2/3" (295mm x 366mm x 93mm)  
 Utility: • imagePASS-A2 Driver  
 Software: • Command WorkStation® 5  
 • Remote Scan 5.3  
 • Web Tools  
 Standard Features: • Hot Folder  
 • Secure Erase  
 • Paper Catalog  
 • Virtual Printers  
 Options: • SeeQuence Suite  
 • SeeQuence Impose  
 • SeeQuence Compose  
 • Image Enhance Visual Editor  
 • X-Rite Eye-One

Options: • SeeQuence Suite  
 • SeeQuence Impose  
 • SeeQuence Compose  
 • Removable Hard Disk Drive  
 • Integration Interface and Stand (19" display, keyboard, mouse, and furniture stand)  
 • X-Rite Eye-One

**Other Optional Accessories**

- Upright Control Panel Set-D1
- Utility Tray-A2
- USB Keyboard
- Universal Keyboard Stand-A1
- Copy Card Reader-F1\*
- Braille Label Kit-F1
- ADF Access Handle-A1
- Convenience Stapler-B1
- PCL Printer Kit-AS1
- PCL International Font Set-A1\*\*
- PS Printer Kit-AS1\*\*\*
- Direct Print Kit (for PDF/XPS)-H1\*\*\*\*
- Encrypted Secure Print Software-D1
- Barcode Printing Kit-D1\*\*
- Web Access Software-H1\*\*\*\*\*
- Universal Send Advanced Feature Set-F1
- Universal Send Security Feature Set-D1
- Universal Send Digital User Signature Kit-C1
- Super G3 Fax Board-AD2
- Super G3 2nd Line Fax Board-AD1^
- Super G3 3rd/4th Line Fax Board-AE1^^
- Remote Fax Kit-A1\*\*\*
- Secure Watermark-B1
- Silex Wireless Bridge SX-2500CG
- USB Device Port-A2
- Multimedia Reader/Writer-A2\*
- Additional Memory Type D (512MB)
- Document Scan Lock Kit-B1
- HDD Data Encryption and Mirroring Kit-C7
- HDD Data Erase Scheduler
- Removable HDD Kit-AH1
- 2.5-inch/160GB HDD-G1
- 2.5-inch/1TB HDD-L1
- Voice Guidance Kit-F2\*\*
- Voice Operation Kit-C2\*\*
- Remote Operator's Software Kit-B1
- Copy Control Interface Kit-A1\*\*\*
- IEEE 2600.1 Common Criteria Certification\*\*

\* If "Quick Startup Settings for Main Power" is set to ON, it takes 7 seconds until the key operation on the touch-panel display is available after turning on the main power.  
 \*\* Including toner bottle and Duplex Color Image Reader.  
 \*\*\* EPS can be printed directly only from Remote User Interface.  
 ^ XPS cannot be printed directly from the Web Access software.  
 ^^ Will be available approximately six months after launch.  
 ^^ When the Auxiliary Tray is extended.  
 • Requires the Copy Card Reader Attachment Kit-A2.  
 • Requires PCL Printer Kit-AS1.  
 • Requires Additional Memory Type D (512MB).  
 • Requires Direct Print Kit-H1 for printing PDF files.  
 ^ Requires Super G3 Fax Board-AD2.  
 ^^ Requires Super G3 2nd Line Fax Board-AD1.  
 ^^ Cannot be installed with Super G3 Fax Board-AD2.  
 \* Requires USB Device Port-A2.  
 \*\* Voice Guidance Kit-F2 and Voice Operation Kit-C2 cannot be installed together.  
 \*\*\* Cannot be installed with Copy Card Reader-F1.  
 NOTE: Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Canon Authorized Dealer for details.

**ColorPASS-GX400 Controller**

Type: Embedded  
 Processor: Intel® Core™ i5-660 Processor 3.33GHz  
 System: Fiery® System 10  
 PDL Support: Adobe PS 3  
 Print: 1200 x 1200 dpi  
 Resolution: 2400 dpi equivalent x 600 dpi  
 Memory: 2GB/4GB (Standard/Maximum)  
 HDD: 500GB  
 Interface (to LAN): 10Base-T/100Base-TX/1000Base-T  
 Dimensions (H x W x D): 19-15" x 8-1/2" x 19" (485mm x 215mm x 483mm)  
 Utility: • ColorPASS GX-400 Driver  
 Software: • Command WorkStation® 5  
 • Remote Scan 5.3  
 • Web Tools  
 Standard Features: • Hot Folder  
 • Secure Erase  
 • Paper Catalog  
 • Virtual Printers  
 • Fiery Graphics Arts Package  
 • Image Enhance Visual Editor  
 • VDP Enhancement



**1-800-OK-CANON**  
**www.usa.canon.com**

**Canon U.S.A., Inc.**  
**One Canon Park**  
**Melville, NY 11747**

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. CANON, IMAGERUNNER, IMAGEPASS, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain other countries. IMAGEANYWARE is a trademark of Canon. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged. Specifications and availability are subject to change without notice. Some items may not be available at this time, please check for availability. All printer output images are simulated.  
 ©2013 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

